
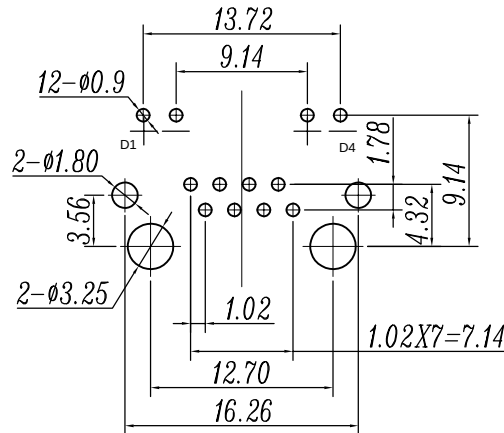
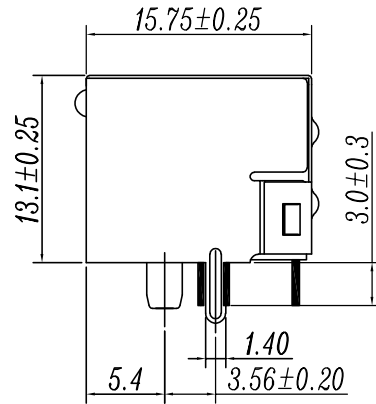
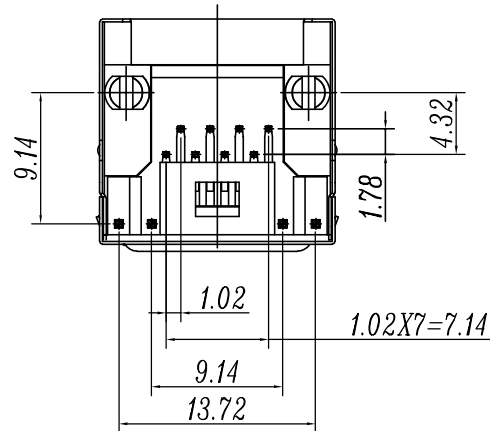


RoHS Compliant

Mechanical:

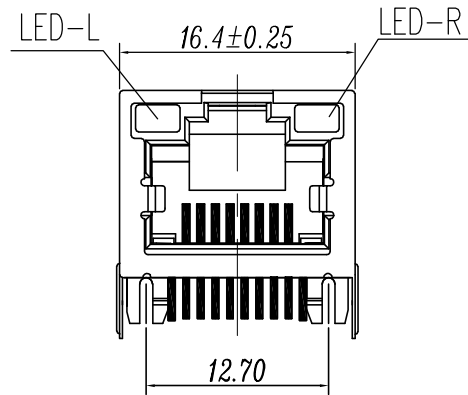

PC Board Layout
Top View

SPECIFICATIONS :

MATERIAL:

- 1.HOUSING MATERIAL: GLASS FILLED LCP(UL94V-0).
- 2.CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM.
- 3.PLATING: GOLD PLATING 15u"OVER NICKEL.

ELECTRICAL:

- 1.VOLTAGE RATING: 125Vac RMS .
- 2.CURRENT RATING: 1.5AMP .
- 3.CONTACT RESISTANCE: 30mΩ MAX .
- 4.INSULATION RESISTANCE: 500MΩ MIN @ 500Vdc .
- 5.DIELECTRIC WITHSTANDING VOLTAGE: 1000Vac RMS 50Hz 1MIN.


MECHANICAL:

- 1.DURABILITY : 750 CYCLES MIN.
- 2.INSETION FORCE: 2.2Kgf MAX.
- 3.RETENTION STRENGTH : 7.7Kgf MIN BETWEEN JACK AND PLUG.

ENVIRONMENTAL:

- 1.STORAGE TEMPERATURE : -40°C TO 85°C.
- 2.OPERATION TEMPERATURE : -40°C TO 70°C.

PART NUMBER:



QC : Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd		
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE		
	.X± 0.38	X.*± 2.0°	RJ45 5JA带灯无弹扁针LCP镀金15u 左绿右绿橙		
	.XX± 0.20	.X*± 1.0°	DRAWING NUMBER		
	.XXX± 0.10		61000011		
APPROVE	CHECK		DRAW	PROJ.	SHEET 1 OF 1
			CLT 2024,03,05	SCALE 5:2	SIZE A3 REV A