




Mechanical:

REV	MODIFICATION	DATE	DRAW	APPROVE



ELECTRICAL:




- ELECTRICAL:**
- 1.VOLTAGE RATING: 125 VAC RMS
 - 2.CURRENT RATING: 1.5 AMP
 - 3.CONTACT RESISTANCE: 20mΩ MAX.
 - 4.INSULATION RESISTANCE: 1000MΩ MIN. AT500V DC.
 - 5.DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1MINUTE

1.HOUSING:LCP BLACK, UL 94V-0

- 1.HOUSING: ECP BLACK; 6E 94V-0
2.CONTACT: PHOSPHOR BRONZE T=0.30MM
3.PLATING: 6u GOLD PLATING AT CONTACT AREA, MATTE
TIN AT TAIL 100U MIN., NICKEL 30U MIN. OVER ALL.
4.SHELL: BRASS T=0.20
5.OPERATING LIFE: 750 CYCLES MIN.
6.MATING/UNMATING FORCE: 30N/3.06KgF MAX.
7.RETENTION STRENGTH: 50N OR 30N MIN.FOR 60S±5S

1.STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%

- 2.GUARANTEE PERIOD:12 MONTHS
3.OPERATION: -40°C TO +85°C
4.MANUAL SOLDERING PARAMETERS:24H
IR TEMPERATURE: 255±5°C 5-10 SECONDS.

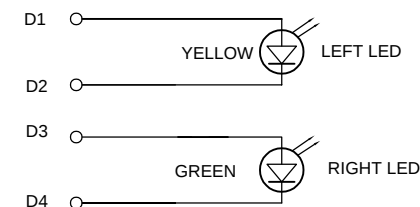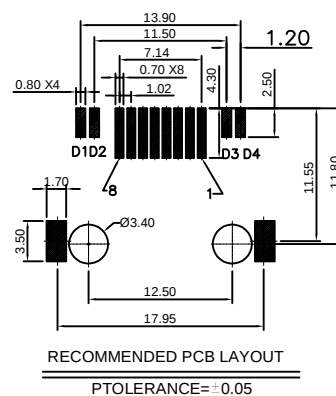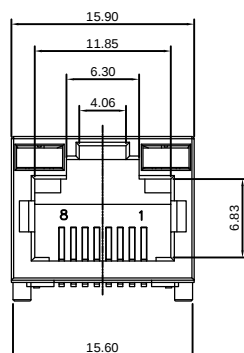

QC Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd			
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE			
	,X± 0.38	X,*± 2.0°	RJ45 JACK SMT SHIELDED WITH LED			
	,XX± 0.20	,X*± 1.0°	DRAWING NUMBER			
	,XXX± 0.10		41000011			
APPROVE	CHECK	DRAW CLT 2023,10,05	PROJ. 	SHEET 1 OF 3		
			SCALE 3:1	SIZE A3	REV A	