
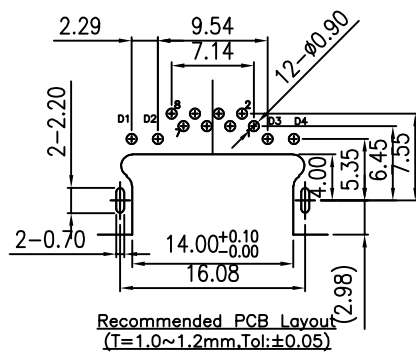


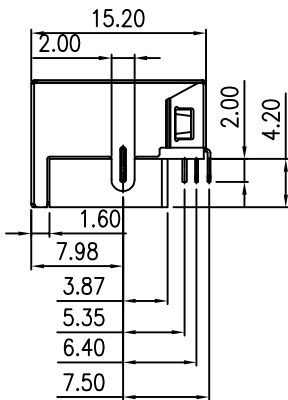
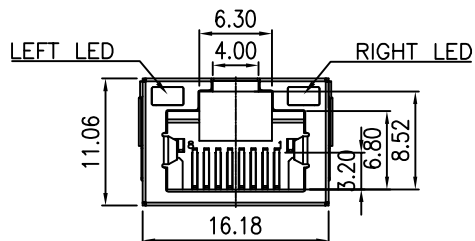



RoHS Compliant


Mechanical:

REV	MODIFICATION	DATE	DRAW	APPROVE



NOTES:

1. MATERIAL
  - 1.1 HOUSING:LCP,BLACK,UL94 V-0
  - 1.2 CONTACT:COPPER ALLOY,CONTACT AREA:PLATING 6u", SLODER AREA: PLATING SN 80U"MIN.
  - 1.3 SHELL:COPPER ALLOY,PLATING NI 30U"MIN.
2. ELECTRICAL:
  - 2.1 CURRENT RATING: 1.5A MAX.
  - 2.2 VOLTAGE RATING :150V AC MIN. (RMS)
  - 2.3 WITHSTANDING VOLTAGE: 1000V AC FOR 1 MINUTE
  - 2.4 INSULATION RESISTANCE: 500MΩ MIN.
  - 2.5 CONTACT RESISTANCE: 40mΩ MAX.
3. ENVIRONMENTAL:
  - OPERATING TEMPERATURE: -40°C TO +85°C

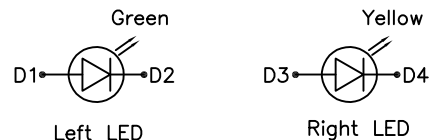

QC : Inspection Item	DIMENSION IN mm [Inch]		<b>ZhenDeng Electronics Co.,Ltd</b>		
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE		
	.X± 0.38	X.*± 2.0*	RJ45 RA TH SINK 4.2mm SHIELDED WITH LED		
	.XX± 0.20	.X*± 1.0*	DRAWING NUMBER		
.XXX± 0.10		11000011			
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 3	
		CLT 2023,10,05	SCALE 3:1	REV A	