
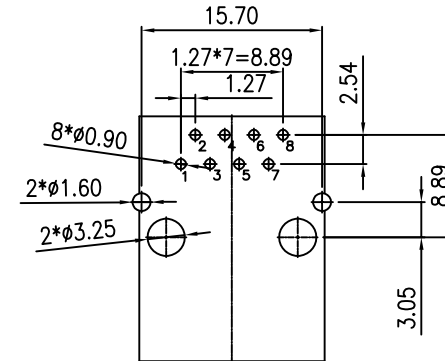
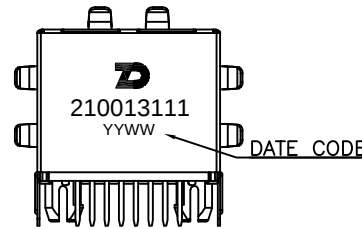
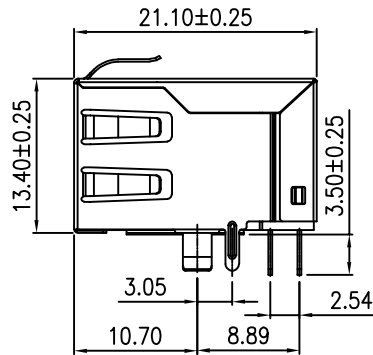




RoHS Compliant

Mechanical:



ConnectMaterial:

- 1.SHELL: COPPER ALLOY PLATING: 30u" NICKEL MIN.
- 2.HOUSING AND INSERTER: PBT, UL94V-0, COLOR: BLACK.
- 3.RJ45 TERMINAL: PHOSPHOR BRONZE T=0.35mm
PLATING: 30u" NICKEL Min. UNDER PLATED
ALL OVER 100u" TIN Min. PLATED ALL OVER
6u" GOLD PLATED ON CONTACT AREA.
- 4.OTHERS TERMINAL: BRASS T=0.35mm
PLATING: 30u" NICKEL Min. UNDER PLATED
ALL OVER 100u" TIN Min. PLATED ALL OVER.


RECOMMENDED PCB LAYOUT
(COMPONENT SIDEVIEW)

ALL DIMENSION TOLERANCE ARE $\pm 0.05\text{mm}$

QC Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd			
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE			
	.X $\pm$ 0.38	X.* $\pm$ 2.0°	RJ45 1X1 10/100 BASE-T			
	.XX $\pm$ 0.20	.X* $\pm$ 1.0°	DRAWING NUMBER			
	.XXX $\pm$ 0.10		21003111			
APPROVE	CHECK		DRAW	CLT	PROJ.	SHEET 1 OF 3
			2024,05,10	2024,05,10	SCALE 1:1	REV A
					SIZE A3	

RoHS Compliant

Schematic:

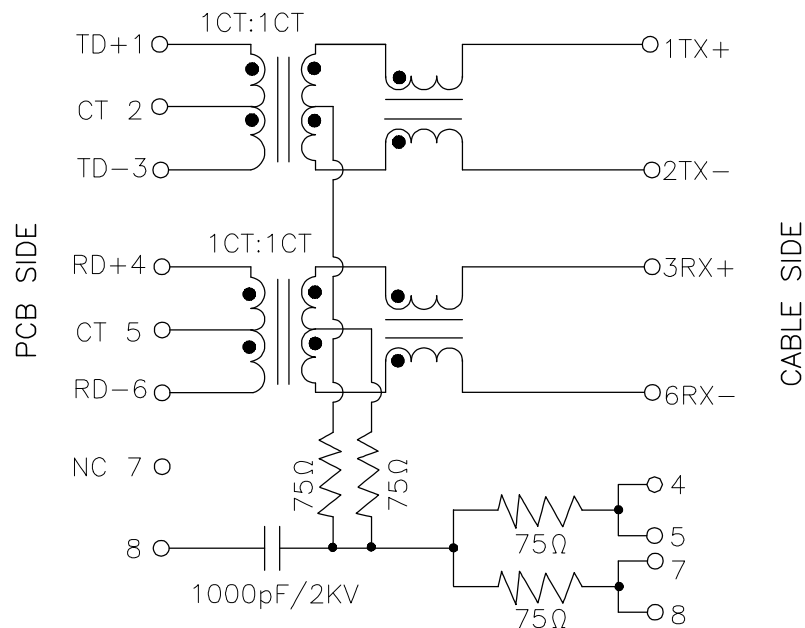

REV	MODIFICATION	DATE	DRAW	APPROVE

Electrical Specifications @25°C

Turns Ratio (±2%)		OCL (uH Min.) @100 KHz/0.1V with 8mA DC Bias	Cross talk (dB Min.)				Hi-POT 1.0 mA (V)	
TX	RX		0.5-10 MHz	30 MHz	50 MHz	100 MHz	WITHOUT RESISTOR	WITH RESISTOR
1CT:1CT	1CT:1CT	350	-50	-40	-35	-30	1500 AC	2250 DC

Continue

Insertion Loss (dB Max.)		Return Loss (dB Min.) @ Load 100 OHM					CMR (dB Min.)
1-100 MHz	100-125 MHz (10/100/1000)	1-30 MHz	30-50 MHz	60 MHz	60-80 MHz	80-100 MHz (10/100/1000)	
-1.0	-1.2	-18	-16	-14	-12	-10	-30

Operating and Storage Temperature:


Operating Temperature : 0°C to +70°C.

Storage Temperature : -40°C to +85°C.

QC Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd			
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE			
	.X± 0.38	X.*± 2.0°	RJ45 1X1 10/100 BASE-T			
	.XX± 0.20	.X*± 1.0°	DRAWING NUMBER			
	.XXX± 0.10		21003111			
APPROVE		CHECK	DRAW	PROJ.	SHEET	OF
			CLT 2024,05,10		2	3
			SCALE 1:1	SIZE A3	REV A	

RoHS Compliant

Packing:

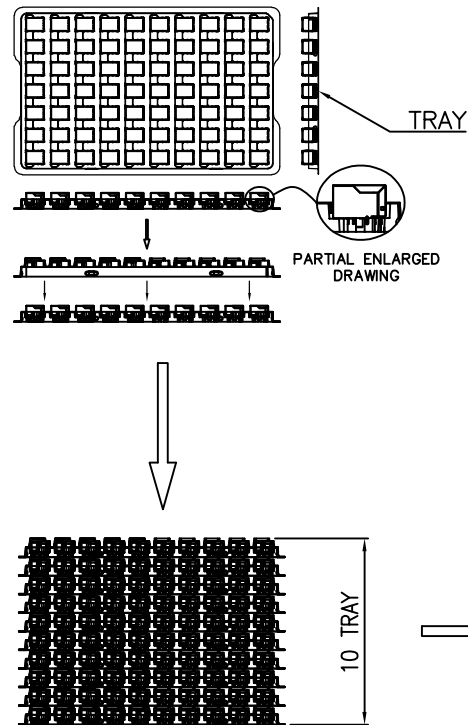

WATER-PROOF BAG

DESICCANT

PACKAGING TAPE



PE FILM

CARTON

NOTES:

1. PRIMARY PACKING: 70PCS/TRAY
2. SECONDARY PACKING: 10TRAY/CARTON(700PCS/CARTON)
3. CARTON SIZE: 340x215x255mm

REV	MODIFICATION	DATE	DRAW	APPROVE

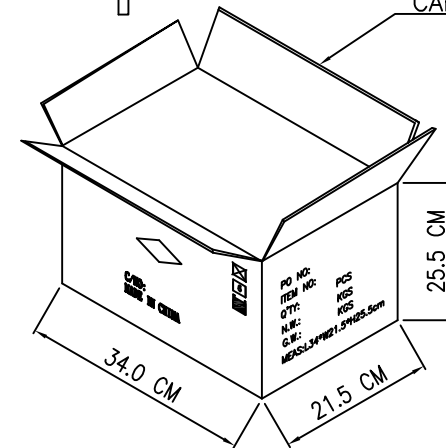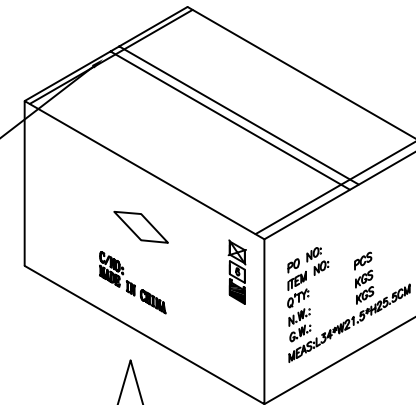

QC Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd			
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE			
	.X± 0.38	X.*± 2.0°	RJ45 1X1 21&31- PACKING			
	.XX± 0.20	.X*± 1.0°	DRAWING NUMBER			
	.XXX± 0.10		21&31-PACKING			
APPROVE	CHECK		DRAW	CLT	PROJ.	SHEET 3 OF 3
			2024,05,10	2024,05,10	SCALE 1:1	REV A
					SIZE A3	