

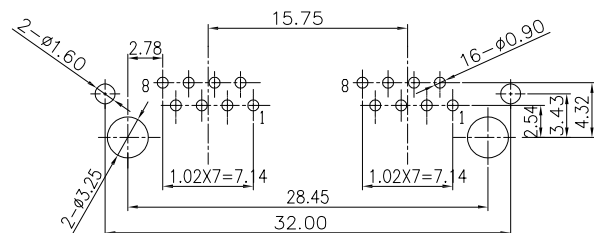
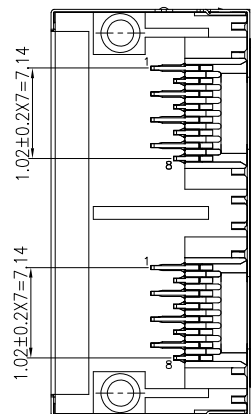


RoHS Compliant

Mechanical:

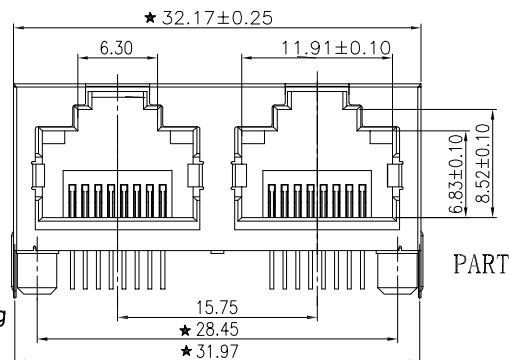

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
P.C.B THICKNESS=1.60MM (TOLERANCE=±0.05)

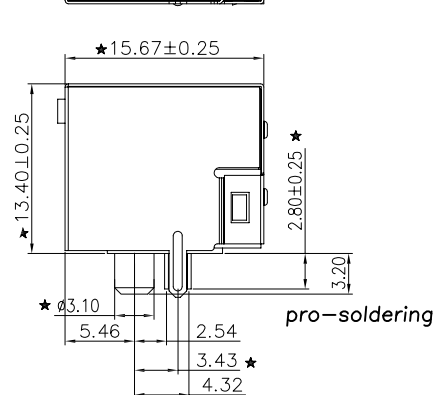

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 500 VAC 50Hz 1MINUTE

MECHANICAL:

1. HOUSING MATERIAL: PBT, BLACK, UL 94V-0 (ROHS)
2. INSERT GLASS: GLASS FILLED PBT BLACK, UL94V-0 (ROHS)
3. CONTACTS: PHOSPHOR BRONZE, T=0.30mm.,
15 U" GOLD PLATING ON CONTACT AREA.
30U MIN NICKEL PLATED OVERALL.
4. SHIELD: T=0.20mm, C2680&H65, 30U MIN NICKEL PLATED OVERALL.
5. OPERATING LIFE: 750 CYCLES MIN.
6. MATING FORCE: 22N MAX.
UNMATING FORCE: 22N MAX.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C
2. OPERATION: -40°C TO +85°C

QC : Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd			
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE			
	.X± 0.38	X.°± 2.0°	5JA 1X2 WITH EMI FINGER			
	.XX± 0.20	.X°± 1.0°	DRAWING NUMBER			
	.XXX± 0.10		32000011			
APPROVE	CHECK		DRAW	PROJ.	SHEET 1 OF 1	
			CLT 2023,05,12	SCALE 3:1	SIZE A3	REV A