

RoHS Compliant

REV	MODIFICATION	DATE	DRAW	APPROVE

NOTE:


1. MATERIAL:

- 1.1 HOUSING PLASTIC: PBT, UL94V-0, BLACK,
- 1.2 CONTACT: C51000, DIA=0.46mm, 15U GOLD PLATING OVERALL
- 1.3 SHELL: C2680 & H65, T=0.20MM, 30U MIN NICKEL PLATING OVERALL.

2. ELECTRICAL CHARACTERISTICS:

- 2.1. CURRENT RATING: 1.5A MAX
 - 2.2. VOLTAGE RATING: 150VAC MAX.
 - 2.3. INSULATION RESISTANCE: 1000M OHMS MIN.
 - 2.4. DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC
3. MECHANICAL CHARACTERISTICS:
- 3.1. DURABILITY: 750 CYCLES.
 - 3.2. OPERATING TEMP.: -40°C TO +85°C
 - 3.3. STORAGE: -40°C TO +85°C
 - 3.4. STORAGE TIME LIMIT: 12 MONTHS.

4. THE CONNECTOR IS ROHS COMPLIANT

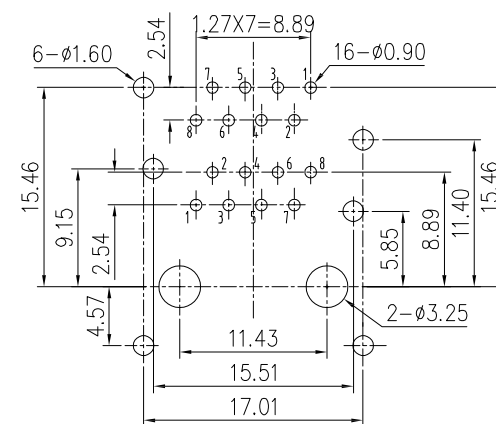

PC BOARD LAYOUT
COMPONENT SIDE SHOWN
THICKNESS=1.6mm

QC Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd		
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE		
	.X± 0.38	X.°± 2.0°	RJ45 2X1 DIP 8P8C 扁针 无灯三面带弹 FU		
	.XX± 0.20	.X°± 1.0°	DRAWING NUMBER		
	XXX± 0.10		71000011		
APPROVE	CHECK		DRAW	PROJ.	SHEET 1 OF 1
			CLT 2022,02,24	SCALE 1:1	REV A