
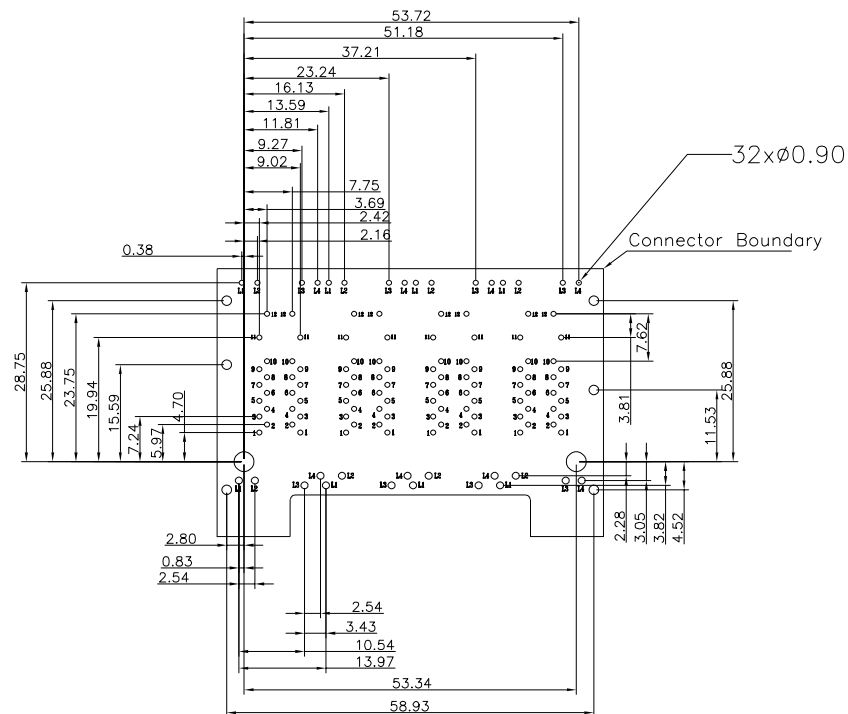
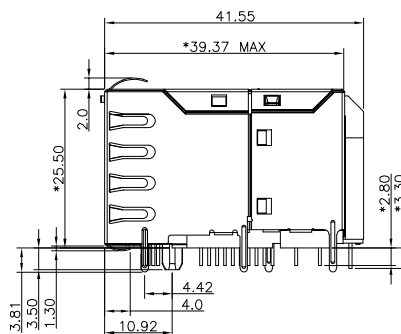
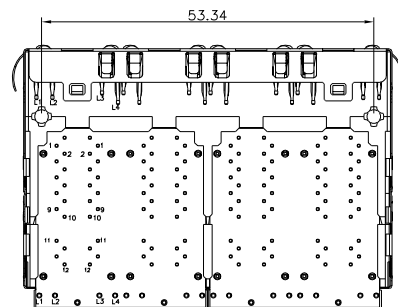
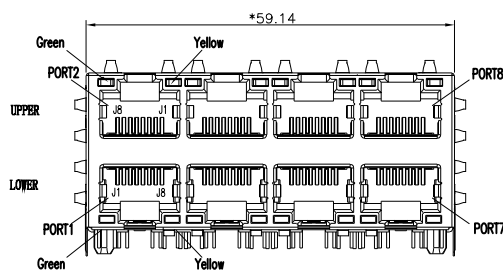


RoHS Compliant

Mechanical:

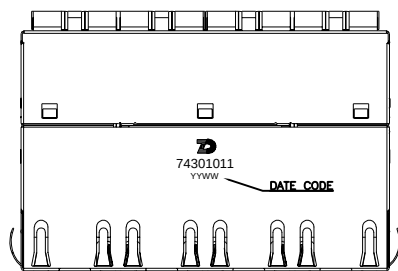

PCB Layout

Notes:


- CONNECTOR MATERIAL:
HOUSING:THERMOPLASTIC BLACK UL94 V-0
SHIELD:Brass
SHIELD PLATING:NICKEL
CONTACT:PHOSPHOR BRONZE
CONTACT PLATING:SELECTIVE GOLD,30 MICRO-INCHS MIN IN CONTACT AREA
- PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
- RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
- THE PART IS RECOMMENDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260° C MAX,10 SECS MAX
- OPERATING TEMPERATURE T=-40°C TO +85°C.
- STORAGE TEMPERATURE T=-40°C TO +85°C.

QC : Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd		
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE		
	.X± 0.38	X.*± 2.0'	RJ45 2X4 10/100/1000 BASE-T PCB JACK		
	.XX± 0.20	.X.*± 1.0'	DRAWING NUMBER		
	.XXX± 0.10		74301011		
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 3	
		CLT 2024,05,10	SCALE 1:1	SIZE A3	REV A

RoHS Compliant

Schematic:


PCB SIDE

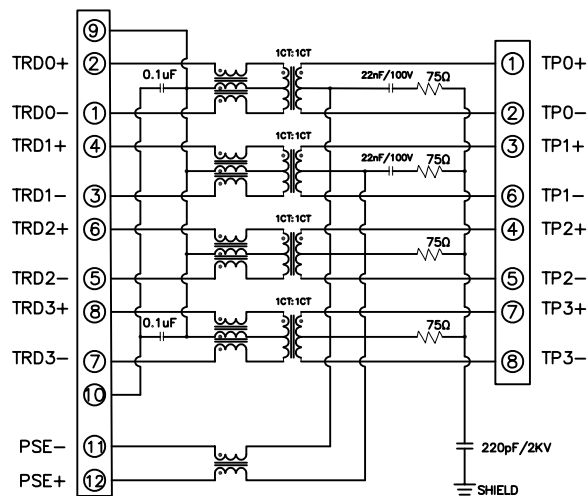

RoHS Compliant

Packing:

数量: 1盘X12PCS = 12PCS/盘

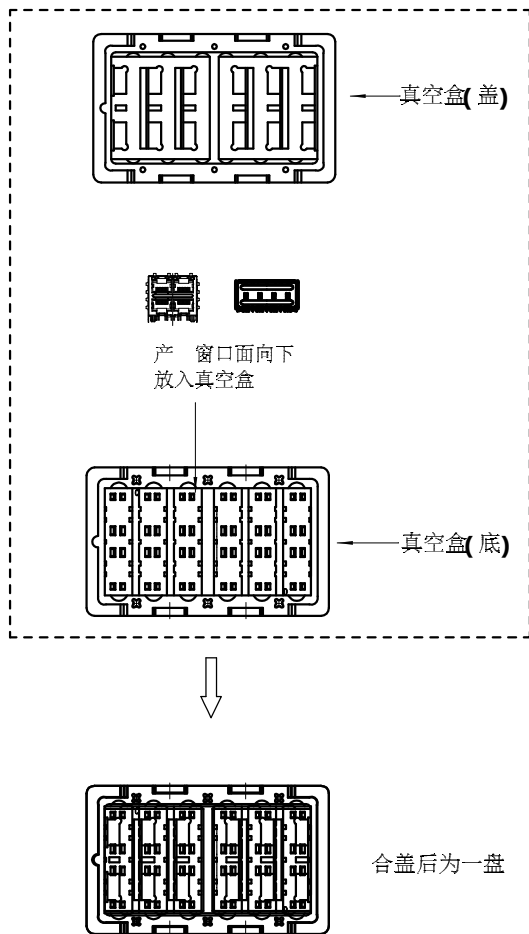

合盖后的一盘

4盘一列

珍珠泡棉(2) (305*185*15) X2
两个长边对应的面各放置一片

珍珠泡棉(1) (305*185*10) X2
顶面和底面各放置一片

珍珠泡棉(3) (217*185*15) X2
两个短边各放置一片

NOTES:

1. PRIMARY PACKING: 12PCS/TRAY
2. SECONDARY PACKING: 4TRAY/CARTON(48PCS/CARTON)
3. CARTON SIZE: 340x220x200mm

QC : Inspection Item	DIMENSION IN mm [Inch]		ZhenDeng Electronics Co.,Ltd			
	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE			
	.X± 0.38	X."± 2.0"	RJ45 2X4 10/100/1000 BASE-T PCB JACK			
	.XX± 0.20	.X"± 1.0"	DRAWING NUMBER			
	.XXX± 0.10		74301011			
APPROVE	CHECK		DRAW	PROJ.	SHEET 3 OF 3	
			CLT 2024,05,10	SCALE 1:1	SIZE A3	REV A